

A variety of tooth options are available on the 2460XP, ensuring that you can produce the perfect product for your markets. It excels at processing larger diameter material, stumps and chunkwood.

# **DISCHARGE TO GREAT**

The discharge conveyor makes it easy to load open-top trucks or build large piles of chips and mulch. The two-stage belt conveyor consists of a 42"-wide primary belt that pulls everything from under the mill to the 2 speed secondary belt.

The Model 2460XP is maintenance-friendly with easy access to wear items, and simple hydraulic and electrical systems. Screens are simple to change by being pulled from the side of the machine, and ladders, steps and handrails help operators feel secure while climbing and working on the machine. There is easy access to the mill for changing teeth and cutterbodies.

When encountering ungrindable contaminants, The Beast's patented cutterbodies and teeth are designed to absorb the shock of the blow, protecting the cuttermill and support arms. This limits the downtime for mill repairs to the time it takes to replace teeth and rakers. And the 2460XP, like every other one of The Beast horizontal grinders, has a unique waste gate that makes it easy to guickly remove of any contaminants from the mill and screening area, limiting damage to the mill and wear parts.



6750 Millbrook Rd. • Remus, MI 49340 • 1-800-952-0178







Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers The Beast® Horizontal Grinders • Track Carriers • Attachments

# **SPECIFICATIONS**

246	60XP
42'8"	1,300.5 cm
8' 6"	259.1 cm
13' 6"	411.5 cm
48,000 lbs. (21,772 kg)	
525 or 536 HP	
200 gal.	757 L
120 gal.	454 L
	42'8" 8' 6" 13' 6" 48,000 lbs. (2' 525 or 536 HP 200 gal.

ENGINE OPTION 1	ENGINE OPTION 2
Make and Model: CAT C13	Make and Model: Deere 6135
Gross HP: 536 HP	Gross HP: 525 HP
Fan: Reversing	Fan: Reversing
Clutch Type: HPT012 PT Tech Dry	Clutch Type: HPT013 PT Fluid Clutch

DIMENSIONS			
Capacity:	24" Capacity	61 cm Capacity	
Opening:	24" tall x 60" wide	61 cm x 152 cm wide	
Cuttermill:	36" dia. x 60" wide	91 cm dia. x 152 cm wide	
Teeth:	30		
Feed Wheel:	(1) 20" dia. x 59" wide	(1) 51 cm x 150 cm wide	
Infeed Conveyor: 5-speed (10-50 FPM), 14'8" long x 60" wide (447 cm long x 152 cm wide)			

Discharge Conveyor: Primary and Secondary discharge conveyors.

Secondary Conveyor: 22'9" long x 42" wide (up to 381-584 FPM conveyor speed, stacking height 15' (457.2 cm)

### **UNDERCARRIAGE**

Towable: (2) 20,000 pound (9,072 kg) axles with (4) 385/60R 22.5" (57.2 cm) tires

### **Standard & Custom Colors Available**

Choose from two standard colors, or select a custom color to match your fleet.





Bandit Yellow

### /ellow Gi

## COMMITTED TO QUALITY & PRODUCTIVITY

Since 1983, Bandit has manufactured equipment for a multitude of wood waste processing markets. The vision since the beginning, is to build quality, highly productive, easy to maintain equipment providing years of dependable service.

The commitment for quality, innovation and dedication is instilled in every employee and is one of the main reasons why Bandit became an Employee-Owned Company (ESOP) in 2018. These core values ensure each Bandit machine will leave the factory ready to exceed your expectations.


# **GO-ANYWHERE TRACK MOBILITY**

Caterpillar steel track undercarriage can be added to the 2460XP. This feature allows it to travel over rough terrain not accessible by towable units. It also eliminates the need to forward or skid material to the 2460XP – the operator can take the grinder to the trees.



## TEST OUR METAI

When you choose The Beast® Horizontal Grinder, you'll experience more uniform chip production, smoother and more efficient chipping, long-lasting components and improved fuel economy. We invite you to see for yourself by scheduling a demo with your nearest authorized Bandit dealer.

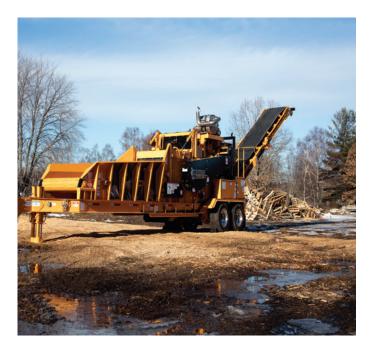

Bandit Offers a Complete Line of Tree Care Equipment: Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers The Beast® Horizontal Grinders • Track Carriers • Attachments